


# LISTWY ZĘBATE


Listwy mają szlifowane powierzchnie boczne

Tolerancja dla podziałki +/- 20  $\mu\text{m}$   
 Sumaryczna tolerancja podziałki +/- 30  $\mu\text{m}$  na 500 mm  
 Klasa uzębienia od 8 do 9 DIN 3962/63/67  
 Proste uzębienie  
 Kąt przyporu 20° Materiał C 45 UNI 7845

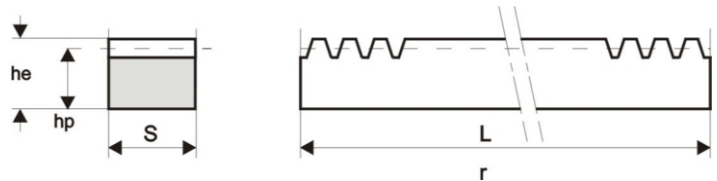

MODUŁ	hp	he x S	L		
			500	1000	2000
			kg	kg	kg
1,0	14,0	15 x 15	0,820	1,500	3,100
1,5	15,5	17 x 17	1,000	2,000	4,000
2,0	18,0	20 x 20	1,400	2,700	5,400
2,5	22,5	25 x 25	2,100	4,300	8,600
3,0	27,0	30 x 30	3,100	6,300	12,500
4,0	18	22 x 22	1,400	3,250	6,800
4,0	21,0	25 x 25	1,800	3,650	7,300
4,0	26,0	30 x 30	3,050	6,000	11,900
4,0	36,0	40 x 40	5,500	11,100	22,000
5,0	45,0	50 x 50	8,300	17,500	34,600
6,0	54	60 x 60	12,650	25,000	51,000
8,0	72,0	80 x 80	22,400	45,000	90,000

\*możliwość dostarczenia L=3000



## DANE TECHNICZNE

MODUŁ	PODZIAŁKA	S	L					
			500		1000		2000	
			Z	Lr	Z	Lr	Z	Lr
1	3,1416	0,5	159	499,51	319	1002,17	637	2001,20
1,5	4,7124	0,6	106	499,51	213	1003,74	425	2002,77
2	6,2832	0,6	80	502,66	160	1005,31	319	2004,34
2,5	7,8540	0,7	64	502,66	123	1005,31	255	2002,77
3	9,4248	0,8	53	499,51	107	1008,45	213	2007,48
4	12,5664	0,8	40	502,66	80	1055,31	160	2010,62
5	15,7080	1,0	32	502,66	64	1005,31	128	2010,62
6	18,8496	1,0	27	508,94	54	1017,88	107	2016,91
8	25,1328	1,0	20	502,66	40	1005,31	80	2010,62